

BannerSaver™ Installation Guide



Picture Illustrates Heavy Banding



Picture Illustrates Standard Banding

BannerSaver™ Installation Guide

Installation Steps:



- 1 Mount top and bottom of bracket to pole with metal bands. Secure metal bands with screw driver.



- 2 Install fiberglass arm and insert pin into nose and arm.



- 3 Insert zip tie through banner grommet and pin.



- 4 Clip excess ends of metal bands and zip ties.

The BannerSaver bracket is easy to install, move and adjust. These step by step instructions will provide the necessary information for any installer to install the perfect light pole banner program.

It is highly recommended that you install the banner at the same time you install the brackets. Installing the brackets prior to installing the banner will likely result in necessary adjustments and incorrect measurements. We recommend a “top-to-bottom” approach.

Necessary Equipment

- ✓ Two BannerSaver™ Brackets per banner
- ✓ Zip Ties (two per banner)
- ✓ Tin Snips
- ✓ Banding (three per bracket)
- ✓ Lift Truck
- ✓ Plastic Snips
- ✓ Electric Screw Driver with 5/16” nut driver
- ✓ Duct Tape

Be sure to read the section on banding consideration.

Installing the Top Bracket

- Position and fully install top bracket
- Use three bands per bracket, six per set
- **Remember—top bracket, spring on top!**

(Duct tape is useful as a third-hand while you secure the banding.)

Install Top Edge of Banner

- Fiberglass arm needs to be 4” longer than banner width
- Insert arm through pole pocket and insert end with the metal sleeve into the nose of the bracket
- Insert Pin through nose and fiberglass arm
- Finish with zip tie through grommet
- Tighten banding and clip excess banding and zip tie

(At this point the top bracket and the top of the banner will be fully installed.)

Installing the Bottom Bracket

Move down the pole and install the bottom bracket and banner.

- Insert fiberglass arm through the pole pocket with the metal sleeve inserted into the nose of the bracket
- Insert the pin through nose and fiberglass arm
- Remember—bottom bracket, spring on bottom!

The banner is now fully extended and attached to the BannerSaver bracket. The BannerSaver bracket is now ready to be installed on the pole.

- Push bottom bracket against pole and install both top bands

Remember, BannerSaver brackets have a one degree cantilever so the bottom of the bracket will stick out one degree.

- Push bottom edge of bracket against pole and install bottom band
- Finish with zip tie through grommet and trim ends of the zip tie and banding

Maintenance

The BannerSaver will work well for many years, limiting banner damage and reducing light pole liabilities, but maintenance is important and recommended as follows:

- Return to the install site within 2-4 weeks of the first install to tighten bands if necessary.
- Check on banding once a quarter and/or after high wind storms.
- It may be necessary to tighten or replace banding from time to time.

Banding and Other Considerations

Important - Choosing The Right Banding

Choosing the right Banding is *essential* for correct BannerSaver™ installations. Here are the points to consider:

Standard Banding: Standard banding works fine for most installations when using the BannerSaver™ Small or XS brackets and in most cases the Medium. It can also work for *some* BannerSaver™ Large bracket installations but never with the BannerSaver™ XL brackets.

Heavy Banding: Heavy Banding is *recommended* and is ideal for most installations and is required for all BannerSaver™ XL brackets. Heavy Banding for your BannerSaver™ should be considered when you have the following situations:

- Tapered Poles
- Square Poles which are 4" or greater on each side

- Double sided banner installations, especially square or tapered poles
- Sites with a history of exceptional wind damage



Important! All banding of any kind, from any company, requires maintenance. Heavy Banding costs more up front but will reduce maintenance costs in the long run.

Bolting and Wall Mount Installations

The BannerSaver can be installed via a bolt instead of banding.

- BannerSaver XS through BannerSaver Large: Install with 3/8" Bolt
- BannerSaver XL: Install with 1/2" Bolt

Wall Mounts: The BannerSaver will spill wind regardless of its mounting on a pole or wall. The customer is responsible for all wall mounted installations, and warranties do not apply due to the wide variation in walls.

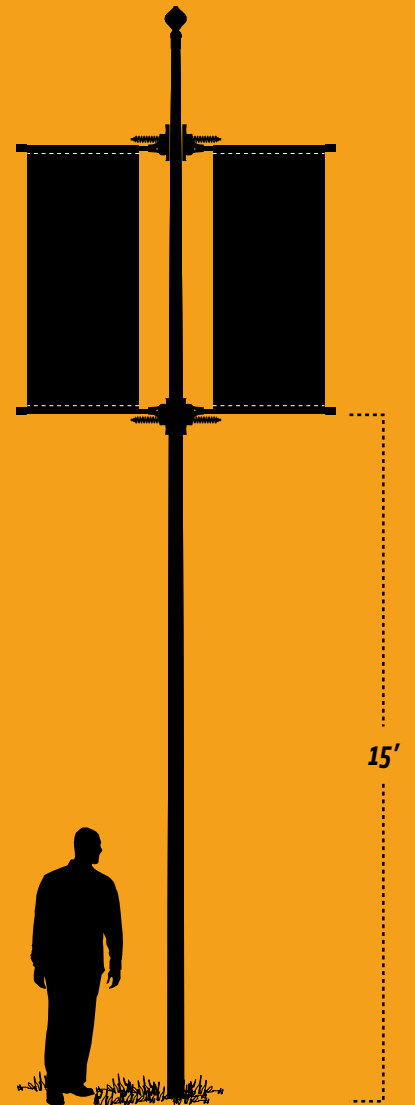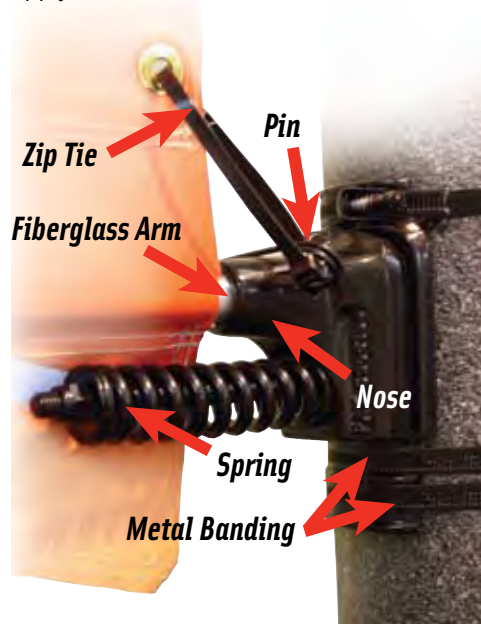

**Recommended Install Height
Minimum of 15'**

BannerSaver™ Installation Guide

BannerSaver™ Warranty

Britten, Inc. provides a ten-year warranty on the BannerSaver against product design, manufacturing and its wind-spilling capabilities as outlined in the BannerSaver Wind Tunnel Test Report and assuming proper installation methods. During this warranty period, Britten, Inc. will replace or repair the BannerSaver. This warranty applies only to the original purchaser and is in lieu of all other warranties either expressed or implied for a period of ten years from the date of purchase.

Britten, Inc. will not warrant the following: SHIPPING; customer is to bear all shipping expense to return the unit to Britten. LABOR; associated with the removal or installation. DAMAGE; caused by misuse, neglect abuse, accidents, alterations, corrosive environments and any other abnormal service conditions. This warranty specifically does not include product damage due to weather conditions rated F-0 and higher (65mph) on the National Weather Service Fujita Scale.

Claims against the warranty must include:

- Clear pictures of installations, including proper banding.
- National Weather Service reporting based on the day of inquiry.

BannerSaver customers recognize that performance related products like the BannerSaver require occasional maintenance including checking for loose banding and/or the replacement of bands. Britten encourages customers to remove light pole banners from poles when a known F-0 or higher storm is expected.

PLEASE NOTE: Domestic (United States) sales to resellers and end-users are made upon the explicit, mutual understanding that all installations will be within the United States unless previously agreed upon in writing.



Ready to go? Want to learn more?
Call us toll-free 24/7 at 1.800.426.9496 or visit www.BrittenBanners.com